



# S360

### Multi-Media Fingerprint Time Attendance Terminal

- จอสี TFT ขนาด 3.5 นิ้ว ID/Mifare, Webserver,
- เก็บลายนิ้วมือได้ 8,000 ลายนิ้วมือ 9 digit user ID, Wi-Fi
- บันทึกข้อมูลได้ 200,000 รายการ
- เชื่อมต่อแบบ RS232, RS485, TCP/IP, USB Host
- ใช้เซ็นเซอร์ ZK OPTICAL SENSER
- โขว์รูปได้



### รองรับจำนวนลายนิ้วมือได้สูง จอใหญ่ ใช้งานสะดวก


### Multi-Media Fingerprint Time Attendance Terminal

S360 is an innovative biometric fingerprint reader for Time & Attendance applications, offering unparalleled performance using an advanced algorithm for reliability, precision and excellent matching speed. The U260-C features the fastest commercial-based fingerprint matching algorithm and high-performance, high-image quality optical fingerprint sensor. The 3 inch TFT can display more information vividly, including fingerprint image quality and verification result etc. TCP/IP communication is standard and make sure the data transmission between terminal and PC can be easily done within several seconds.



### Connection ตัวอย่างระบบควบคุม

#### TCP/IP Network Communication

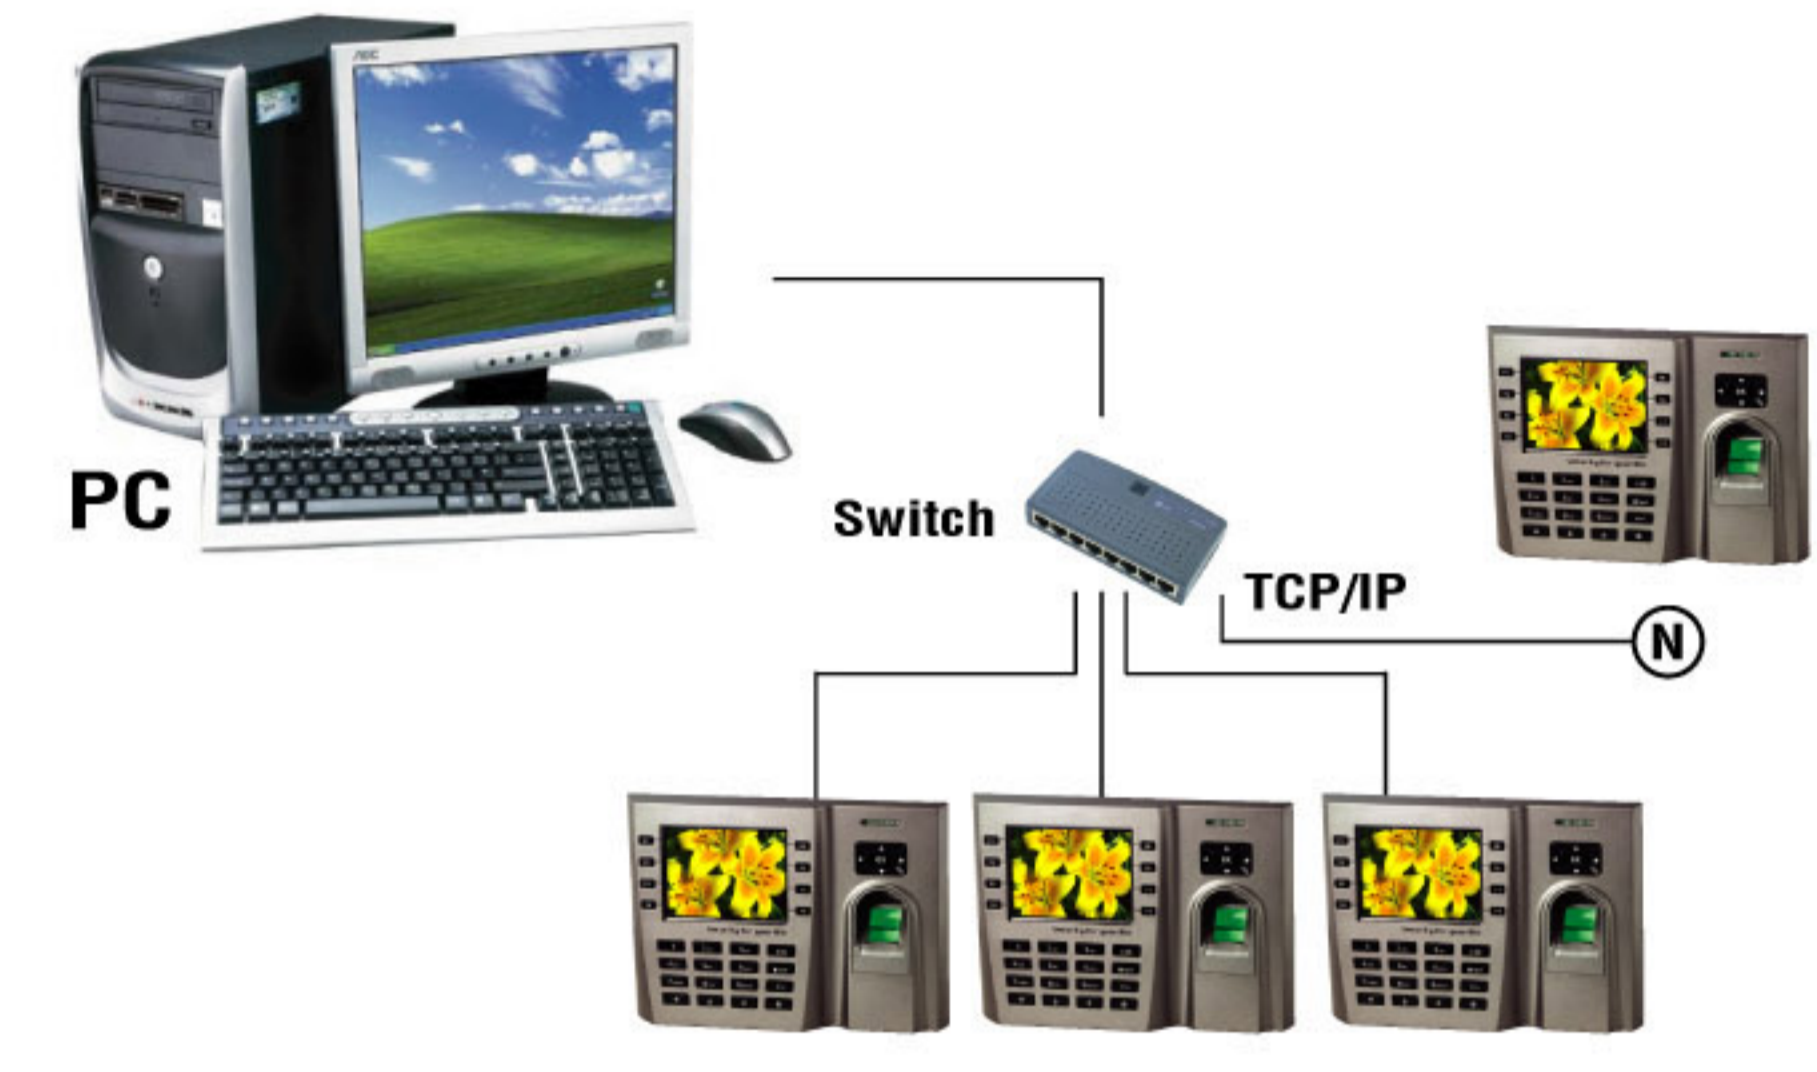

### Multi-Media Fingerprint Time Attendance Terminal

- Color TFT screen with GUI Interface for ease of use.
- Optical Sensor.
- 1 touch a-second user recognition.
- Stores 3,000 templates and 100,000 transactions.
- Reads Fingerprint and/or PINs.
- Optional integrated proximity or smart card reader.
- Built-in Serial and Ethernet ports.
- Multi Language Support
- Built in bell scheduling
- Real-time 1-touch data export 3rd party hosted & non-hosted applications
- Audio-Visual indications for acceptance and rejection of valid/invalid fingers
- SDK available for OEM customers and software developers.

### รองรับจำนวนลายนิ้วมือได้สูง จอใหญ่ ใช้งานสะดวก



#### Specification

Fingerprint Capacity:	8,000 templates
Transaction Capacity:	100,000
Hardware Platform:	ZEM510
Sensor:	Optical Sensor
Algorithm Version:	Finger v10.0
Communications:	RS232/485, TCP/IP, USB-host, USB-client
Standard Functions:	Webserver, Workcode, SMS, DLST, Scheduled-bell, Self-Service Query, Automatic Status Switch, T9 input
Optional Functions:	ID/Mifare/HID, RIS, printer, 9 digit user ID
Display:	3 inches TFT Screen
Power Supply:	5V DC 2A
Operating Temperature:	0-45 degree
Operating Humidity:	20%-80%
Dimension:	192X137X45 mm
Net Weight:	1.15 kg

